




Wall Lights | 220-240 V
1 x powerLED 1.5 W DC - 3 W AC | CRI 80
60680W70

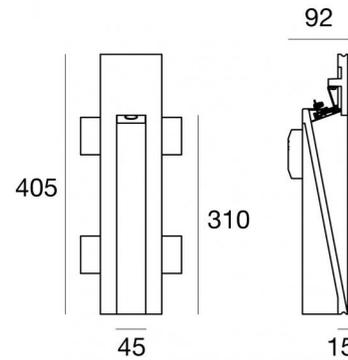

415 x
105

Technical data

Type	Encasement with flange
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	Wide Flood
Nominal power	1.5 W DC
Total Power	3 W
Source lumens	166 lm
Voltage	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1.680 Kg
Electrostatic discharge protection	Yes
Surge protection	No

Finishing casing

Material	plaster
Colour	white

Finishing diffuser

Material	Glass
Colour	transparent



Wall Lights | 220-240 V | 1 x powerLED 1.5 W DC - 3 W AC | CRI 80 | Base
60680W70

Single emission wall lights for indoor application. The warm white LED light source with a wide flood light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 166 lm, with a 110.7 lm/W nominal luminous efficacy.

The device body is made of plaster and features a white finish; the diffuser is made of glass. The ingress protection degree is IP20; the total weight is of 1.680 kg.

The total absorbed power is 3 W.

The device features protection class II and can be wall lights-mounted, with a 415 x 105 mm hole (in plasterboard) with an outer casing, code 64180(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	39 %
Source lumens	166 lm
Delivered lumens	65 lm
Consumption	3 W
Luminaire efficacy	21 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C
Ordinary temperature on the glass	40°C

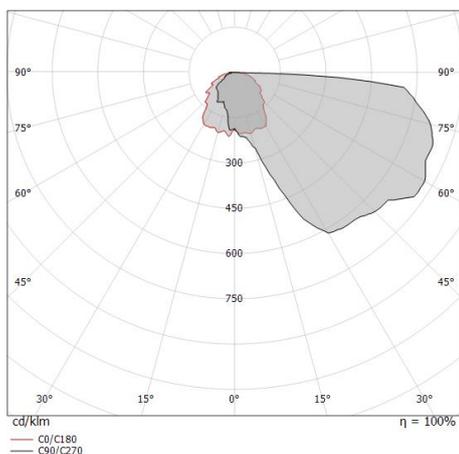



Gypsum_Wf3 | Wall Lights | Accessories
60680W70



Outer casing - formwork for concrete

Type of installation: masonry L=165mm, H=437mm, D=76mm.


Material:Iron, colour:zinc, processing:Galvanising.

Finish

Grey

Code

64180

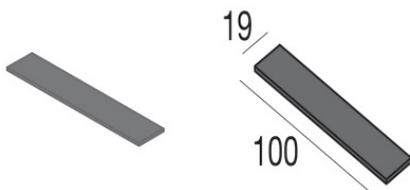

Thick - KIT thicknesses for installation on plasterboard

Code

60830